



Beam&Wash ZoomLed SMALLY- PL750



Optics

7x40W 4IN1 RGBW LED Zoom angle: 3° - 45°
Power Consumption:250W

Control

DMX Mode: 21/24/32/60 CH Control
Mode: DMX512,Master-Slaver,Auto,
Music, and RDM

Pan/Tilt

Pan/tilt:540° /270° (8/16 bit)

Construction

Display: LCD Display
Data in/out: 3pin XLR Sockets Power
Socket: PowerCon in/out Rating: IP20
Double Omega brackets

Feature

Beam & wash effect
Dimmer: 0~100% smooth dimming Quiet
operation ,Flicker free Smooth zoom and 4
Dimming Curve, Pixel Control

Specification


Dimension: 258x178x334mm
NW: 5.5 kg GW:6.5 kg
Flight case packing(6 in 1): 910x570x550mm
Carton packing(1 in 1):310x230x420mm

Beam Angle =3.5°

R lux	17300	5770	2300	871
G lux	39800	11300	4460	1700
B lux	7020	1930	758	291
W lux	61000	18200	7160	2730
4in1 lux	111000	33700	13300	5100

Beam Angle =45°

R lux	2430	319	128	51
G lux	4850	621	249	100
B lux	864	111	45	18
W lux	7850	1010	401	162
4in1 lux	14600	1880	751	302

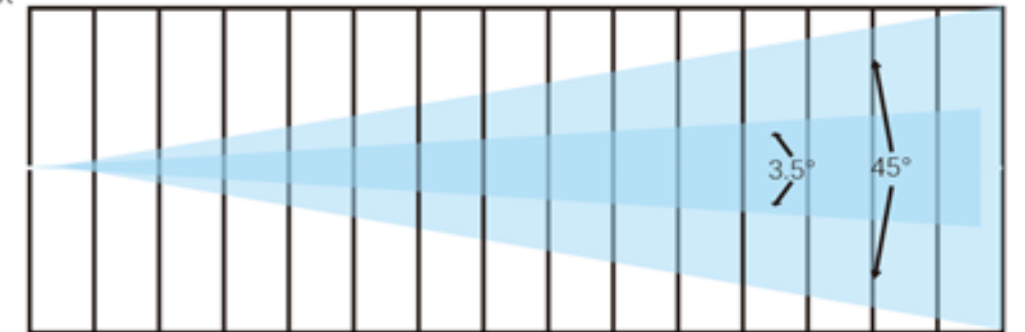

Distance (m)	1	3	5	8
Spot diameter (m) 3.5°	0.23	0.54	0.78	1.28
Spot diameter (m) 45°	1.50	3.00	4.30	1.28

